



OFF THE ROAD RADIAL AND BIAS TIRES

Grupo 108

Business Promoters in Latin America

EL SALVADOR

Grupo 108 Centroamerica SA de CV
Ciudad Satelite, pasaje Aries,
polígono M, casa No. 23, San Salvador,
El Salvador

INDIA

Grupo108 Business Services Pvt. Ltd.
Villa No. 328, Omaxe City II, Mangliya,
Indore, Madhya Pradesh, Pin - 453771
India,

Radial and Bias

www.grupo108.com
info@grupo108.com



Code : GRP-OTR-792

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
23.5R25	E-3+	**	185B	19.50/2.5	38	1615	595	9250	525	TL
23.5R25	L-3+	*	195A2	19.50/2.5	38	1615	595	12150	500	TL
26.5R25	E-3+	**	193B	22.00/3.0	40	1750	675	11500	525	TL
26.5R25	L-3+	*	202A2	22.00/3.0	40	1750	675	15000	500	TL
29.5R25	E-3+	**	200B	25.00/3.5	44	1875	750	14000	525	TL
29.5R25	L-3+	*	208A2	25.00/3.5	44	1875	750	18000	500	TL



Code : GRP-OTR-760

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
17.5R25	E-3	*	176A2	14.00/1.5	27	1350	445	7100	500	TL
17.5R25	L-3	**	167B	14.00/1.5	27	1350	445	5450	525	TL
20.5R25	E-3	**	177B	17.00/2.0	28.5	1490	520	7300	525	TL
20.5R25	L-3	*	186A2	17.00/2.0	28.5	1490	520	9500	500	TL
23.5R25	E-3	**	185B	19.50/2.5	35.5	1615	595	9250	525	TL
23.5R25	L-3	*	195A2	19.50/2.5	35.5	1615	595	12150	500	TL



Code : GRP-OTR-763

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
29.5R25	L-4	*	208A2	25.00/3.5	59.0	1875	750	18000	500	TL



Code : GRP-OTR-768

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
29.5R25	E-4	**	200B	25.00/3.5	50	1920	750	14000	525	TL
29.5R25	L-4	*	208A2	25.00/3.5	50	1920	750	18000	500	TL





Code : GRP-OTR-773

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
23.5R25	L-5	*	195A2	19.50/2.5	76	1675	595	12150	500	TL
23.5R25	L-5	**	201A2	19.50/2.5	76	1675	595	14500	650	TL
26.5R25	L-5	*	202A2	22.00/3.0	86	1800	675	15000	500	TL
26.5R25	L-5	**	209A2	22.00/3.0	86	1800	675	18500	650	TL
29.5R25	L-5	*	208A2	25.00/3.5	94	1920	750	18000	500	TL
29.5R25	L-5	**	216A2	25.00/3.5	94	1920	750	22400	650	TL



Code : GRP-OTR-790

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
23.5R25	L-5	*	195A2	19.50/2.5	76	1675	595	12150	500	TL
23.5R25	L-5	**	201A2	19.50/2.5	76	1675	595	14500	650	TL
26.5R25	L-5	*	202A2	22.00/3.0	86	1800	675	15000	500	TL
26.5R25	L-5	**	209A2	22.00/3.0	86	1800	675	18500	650	TL
29.5R25	L-5	*	208A2	25.00/3.5	94	1920	750	18000	500	TL
29.5R25	L-5	**	216A2	25.00/3.5	94	1920	750	22400	650	TL



Code : GRP-OTR-761

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
15.5R25	E-3	**	160B	12.00/1.3	26	1275	395	4500	525	TL
15.5R25	L-3	*	169A2	12.00/1.3	26	1275	395	5800	500	TL
20.5R25	E-3	**	177B	17.00/2.0	33	1490	520	7300	525	TL
20.5R25	L-3	*	186A2	17.00/2.0	33	1490	520	9500	500	TL
23.5R25	E-3	**	185B	19.50/2.5	36	1615	595	9250	525	TL
23.5R25	L-3	*	195A2	19.50/2.5	36	1615	595	12150	500	TL
26.5R25	E-3	**	193B	22.00/3.0	37	1750	675	11500	525	TL
26.5R25	L-3	*	202A2	22.00/3.0	37	1750	675	15000	500	TL
29.5R25	E-3	**	200B	25.00/3.5	43	1875	750	14000	525	TL
29.5R25	L-3	*	208A2	25.00/3.5	43	1875	750	18000	500	TL
21.00R35	E-3	**	201B	15.00/3.0	44	2005	570	14500	700	TL





Code : GRP-OTR-765

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
14.00R24	E-3	***	169B	10.00/1.5	27.0	1370	375	5800	700	TT
13.00R25	E-3	***	163B	10.00/1.5	27.0	1300	350	4875	700	TT
14.00R25	E-3	***	169B	10.00/1.5	27.0	1370	375	5800	700	TT
24.00R35	E-4	**	209B	17.00/3.5	57.0	2175	655	18500	700	TL



Code : GRP-OTR-771

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
14.00R25	E-4	***	169B	10.00/1.5	38	1420	375	5800	700	TT
18.00R33	E-4	**	191B	13.00/2.5	54	1860	478	10900	700	TL
18.00R33	L-4	*	199A2	13.00/2.5	54	1860	478	13600	550	TL
24.00R35	E-4	**	209B	17.00/3.5	65	2175	655	18500	700	TL



Code : GRP-OTR-775

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
27.00R49	E-4	**	223B	19.50/4.0	63.0	2700	735	27250	700	TT



Code : GRP-OTR-791

RADIAL OTR TYRE

SIZE	TRA Code	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
14.00R24	G2/L2	*	153A8	8.00TG	26.0	1350	360	3650	375	TT



Code : GRP-OTR-767

RADIAL OTR TYRE

SIZE	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
525/80R25 (20.5R25)	**	179E	17.00/2.0	28.5	1490	520	7750	700	TL
525/80R25 (20.5R25)	**	176F	17.00/2.0	28.5	1490	520	7750	700	TL



Code : GRP-OTR-770

RADIAL OTR TYRE

SIZE	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
385/95R25 (14.00R25)	***	170F	10.00/1.5	24	1369	379	6000	900	TL
445/95R25 (16.00R25)	**	174F	11.25/2.0	28	1481	435	6700	900	TL
445/95R25 (16.00R25)	**	177E	11.25/2.0	28	1481	435	6700	900	TL
395/85R20 (14.00R20)	20	170F	10	17.5	1180	386	6000	900	TL



Code : GRP-OTR-775

RADIAL OTR TYRE

SIZE	Ply Rating	Service Index	Standard Rim	Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	Max.Load Capacity (KG)	Cold Inflation Pressure (Kpa)	TT/TL
325/95R24	22	162/160K	9.00	20.0	1228	325	4750	850	TL





Code : GRP-OTR-L-3/E-3

BIAS OTR TYRE

Size	Ply Rating	Pattern	Standard Rim	Inflated size (mm)		Maximum Load (Kg)		Relative Pressure		TT/TL
				Section Width	Overall Diameter	50km/h	10km/h	50km/h	10km/h	
17.5-25	12	L-3	14.00/1.5	445	1350	3650	6150	225	350	TT
17.5-25	16	L-3	14.00/1.5	445	1350	4250	7300	300	475	TT
17.5-25	20	L-3	14.00/1.5	445	1350	5000	8250	400	575	TT
20.5-25	12	L-3	17.00/20	520	1490	4500	6700	200	250	TT
20.5-25	16	L-3	17.00/20	520	1490	5450	8250	275	350	TT
20.5-25	20	L-3	17.00/20	520	1490	6000	9500	325	450	TT
20.5-25	24	L-3	17.00/20	520	1490	6700	10300	400	525	TT
20.5-25	28	L-3	17.00/20	520	1490	7500	11500	475	625	TT
23.5-25	12	L-3	19.50/2.5	595	1615	5300	8000	175	225	TT
23.5-25	16	L-3	19.50/2.5	595	1615	6150	9500	225	300	TT
23.5-25	20	L-3	19.50/2.5	595	1615	7300	10900	300	375	TT
23.5-25	24	L-3	19.50/2.5	595	1615	8000	12500	350	475	TT
23.5-25	28	L-3	19.50/2.5	595	1615	8750	13600	400	550	TT
29.5-29	16	L-3	25.00/3.5	750	1975	8500	14000	175	250	TL
29.5-29	22	L-3	25.00/3.5	750	1975	10600	16000	250	325	TL
29.5-29	28	L-3	25.00/3.5	750	1975	12100	19000	325	425	TL
29.5-29	34	L-3	25.00/3.5	750	1975	14000	21200	400	525	TL
29.5-29	40	L-3	25.00/3.5	750	1975	15000	23600	475	625	TL
37.25-35	30	L-3	31.00/4.0	945	2390	17500	28000	275	375	TL
37.25-35	36	L-3	31.00/4.0	945	2390	19500	30700	325	450	TL
37.25-35	42	L-3	31.00/4.0	945	2390	21800	33500	400	525	TL
26.5-25	16	L-3	22.00/3.0	675	1750	7300	11500	200	275	TL
26.5-25	20	L-3	22.00/3.0	675	1750	8250	13200	250	350	TL



Code : GRP-OTR-L-3/E-3

BIAS OTR TYRE

Size	Ply Rating	Pattern	Standard Rim	Inflated size (mm)		Maximum Load (Kg)		Relative Pressure		TT/TL
				Section Width	Overall Diameter	50km/h	10km/h	50km/h	10km/h	
26.5-25	24	L-3	22.00/3.0	675	1750	9250	14000	300	400	TL
26.5-25	28	L-3	22.00/3.0	675	1750	10000	15500	350	475	TL
26.5-25	32	L-3	22.00/3.0	675	1750	11200	17000	425	550	TL
29.5-25	16	L-3	25.00/3.5	750	1875	8000	12900	175	250	TL
29.5-25	22	L-3	25.00/3.5	750	1875	10000	15000	250	325	TL
29.5-25	28	L-3	25.00/3.5	750	1875	11500	17500	325	425	TL
18.00-25	24	E-3	13.00/2.5	495	1615	7300	12500	425	550	TT
18.00-25	28	E-3	13.00/2.5	495	1615	8000	13600	500	650	TT
18.00-25	32	E-3	13.00/2.5	495	1615	8750	15000	575	750	TT
18.00-25	36	E-3	13.00/2.5	495	1615	9250	16000	625	850	TT
18.00-25	40	E-3	13.00/2.5	495	1615	9750	17000	700	950	TT



TIRES

Code : GRP-OTR-L-3/E-3

BIAS OTR TYRE

Size	Pattern	Overall Diameter (mm)	Section Width (mm)	Standard Rim	Max Load (lbs)	Max. Press (psi)	TT/TL
8.25-16-12	E3/L3	TT	835	235	6.50H	1750	36
7.50-16-12	E3/L3	TT	785	205	5.50F	1565	30



Code : GRP-OTR-L-5S

BIAS OTR TYRE

Size	Ply Rating	Pattern	Pattern Depth	Standard Rim	Inflated size (mm)		Maximum Load (Kg)	Relative Pressure	TT/TL
					Section Width	Overall Diameter			
12.00-20	18	L-5S	56	8.5	320	1228	3270	740	TT/TL
12.00-20	20	L-5S	56	8.5	320	1228	3800	740	TT/TL
12.00-24	20	L-5S	63.5	8.5	320	1228	4200	740	TT/TL
12.00-24	24	L-5S	63.5	8.5	320	1228	4800	740	TT/TL
14.00-20	20	L-5S	63.5	10	342	1300	6000	670	TT/TL
14.00-20	24	L-5S	63.5	10	342	1300	7000	670	TT/TL
14.00-24	20	L-5S	63.5	10	375	1420	8500	700	TT/TL
14.00-24	24	L-5S	63.5	10	375	1420	9500	850	TT/TL
14.00-24	28	L-5S	63.5	10	375	1420	10000	925	TT/TL
14.00-24	32	L-5S	63.5	10	375	1420	10500	1000	TT/TL
14.00-24	36	L-5S	63.5	10	375	1420	11000	1000	TT/TL
16.00-25	28	L-5S	63.5	11.25/2.0	430	1550	11500	750	TL
16.00-25	32	L-5S	63.5	11.25/2.0	430	1550	12500	75	TL
16.00-25	36	L-5S	63.5	11.25/2.0	430	1550	13600	975	TL
16.00-25	40	L-5S	63.5	11.25/2.0	430	1550	14000	975	TL
17.5-25	20	L-5S	63.5	14.00/1.5	445	1400	8250	575	TL
17.5-25	24	L-5S	63.5	14.00/1.5	445	1400	8950	650	TL





Code : GRP-OTR-L-5S

BIAS OTR TYRE

Size	Ply Rating	Pattern	Pattern Depth	Standard Rim	Inflated size (mm)		Maximum Load (Kg)	Relative Pressure	TT/TL
					Section Width	Overall Diameter			
18.00-25	32	L-5S	78.5	13.00/2.5	195	1675	15000	750	TL
18.00-25	36	L-5S	78.5	13.00/2.5	195	1675	16000	850	TL
18.00-25	40	L-5S	78.5	13.00/2.5	195	1675	17000	950	TL
18.00-25	50	L-5S	78.5	13.00/2.5	195	1675	19500	1200	TL
20.5-25	16	L-5S	87.5	17.00/2.0	520	1550	8250	350	TL
20.5-25	20	L-5S	87.5	17.00/2.0	520	1550	9500	450	TL
20.5-25	24	L-5S	87.5	17.00/2.0	520	1550	10300	525	TL
23.5-25	20	L-5S	78.5	19.50/2.5	580	1600	10500	525	TL
23.5-25	24	L-5S	78.5	19.50/2.5	580	1600	11400	650	TL
26.5-25	32	L-5S	87.5	22.00/3.0	675	1795	17000	650	TL
26.5-25	36	L-5S	87.5	22.00/3.0	675	1795	18500	650	TL
26.5-25	40	L-5S	87.5	22.00/3.0	675	1795	19800	750	TL
26.5-25	50	L-5S	87.5	22.00/3.0	675	1795	23500	630	TL
29.5-25	36	L-5S	95	25.00/3.5	745	1875	19500	650	TL
29.5-25	40	L-5S	95	25.00/3.5	745	1875	21000	750	TL
29.5-25	50	L-5S	95	25.00/3.5	745	1875	22800	830	TL
29.5-29	36	L-5S	95	25.00/3.5	714	1970	20000	650	TL
29.5-29	40	L-5S	95	25.00/3.5	714	1970	21000	750	TL
29.5-29	50	L-5S	95	25.00/3.5	714	1970	24000	830	TL



Code : GRP-OTR-L-5

BIAS OTR TYRE

Size	Ply Rating	Pattern	Standard Rim	Inflated size (mm)		Maximum Load (Kg)		Relative Pressure		TT/TL
				Section Width	Overall Diameter	50km/h	10km/h	50km/h	10km/h	
23.5-25	12	L-5	19.50/2.5	595	1673	5300	8000	175	225	TT
23.5-25	16	L-5	19.50/2.5	595	1673	6150	9500	225	300	TT
23.5-25	20	L-5	19.50/2.5	595	1673	7300	10900	300	375	TT
23.5-25	24	L-5	19.50/2.5	595	1673	8000	12500	350	475	TT
23.5-25	28	L-5	19.50/2.5	595	1673	8750	13600	400	550	TT
26.5-25	16	L-5	22.00/3.0	675	1798	7300	11500	220	275	TL
26.5-25	20	L-5	22.00/3.0	675	1798	8250	13200	250	350	TL
26.5-25	24	L-5	22.00/3.0	675	1798	9250	14000	300	400	TL
26.5-25	28	L-5	22.00/3.0	675	1798	10000	15500	350	475	TL
26.5-25	32	L-5	22.00/3.0	675	1798	11200	17000	425	550	TL
29.5-25	16	L-5	25.00/3.5	750	1923	8000	12900	175	250	TL
29.5-25	22	L-5	25.00/3.5	750	1923	10000	15000	250	325	TL
29.5-25	28	L-5	25.00/3.5	750	1923	11500	17500	325	425	TL
29.5-25	32	L-5	25.00/3.5	750	1923	12700	18000	425	550	TL
45/65-45	38	L-5	36.00/4.5	1140	2733	12700	40000	425	450	TL
45/65-45	46	L-5	36.00/4.5	1140	2733	12700	43000	425	530	TL
45/65-45	52	L-5	36.00/4.5	1140	2733	12700	46500	425	600	TL
45/65-45	58	L-5	36.00/4.5	1140	2733	12700	50700	425	675	TL



Code : GRP-OTR-E-4C

BIAS OTR TYRE

Size	Ply Rating	Standard Rim	Inflated size (mm)		Maximum Load (Kg)		Relative Pressure		TT/TL
			Section Width	Overall Diameter	50km/h	10km/h	50km/h	10km/h	
21.00-33	28	15.00/3.0	575	2002	9400	17460	425	575	TT/TL
21.00-33	32	15.00/3.0	575	2002	10300	19160	500	650	TT/TL
21.00-33	36	15.00/3.0	575	2002	11000	20960	550	750	TT/TL
21.00-33	40	15.00/3.0	575	2002	12200	21960	625	825	TT/TL
21.00-33	44	15.00/3.0	575	2002	12700	22960	675	900	TT/TL
21.00-35	38	15.00/3.0	575	2053	12800	23000	550	750	TL
21.00-35	40	15.00/3.0	575	2053	14000	24300	625	825	TL
21.00-35	44	15.00/3.0	575	2053	14500	25000	675	900	TL





Code : GRP-OTR-E-4A

BIAS OTR TYRE

Size	Ply Rating	Standard Rim	Inflated size (mm)		Maximum Load (Kg)		Relative Pressure		TT/TL
			Section Width	Overall Diameter	50km/h	10km/h	50km/h	10km/h	
24.00-35	36	17.00/3.5	650	2178	15500	26500	475	650	TL
24.00-35	42	17.00/3.5	650	2178	16500	29000	550	750	TL
24.00-35	48	17.00/3.5	650	2178	18500	31500	650	850	TL
24.00-35	54	17.00/3.5	650	2178	19500	34500	725	975	TL
24.00-49	36	17.00/3.5	650	2531	18500	32500	475	650	TL
24.00-49	42	17.00/3.5	650	2531	20000	34500	500	750	TL
24.00-49	48	17.00/3.5	650	2531	21800	37500	650	850	TL
27.00-49	36	19.50/4.0	735	2703	21200	36500	425	575	TL
27.00-49	42	19.50/4.0	735	2703	23000	40000	500	675	TL
27.00-49	48	19.50/4.0	735	2703	25000	43700	575	775	TL






Code : GRP-OTR-E-4B

BIAS OTR TYRE

Size	Ply Rating	Standard Rim	Inflated size (mm)		Maximum Load (Kg)		Relative Pressure		TT/TL
			Section Width	Overall Diameter	50km/h	10km/h	50km/h	10km/h	
18.00-25	36	13.00/25	495	1615	9250	16000	625	850	TL
18.00-33	36	13.00/25	495	1820	10600	18500	625	850	TL

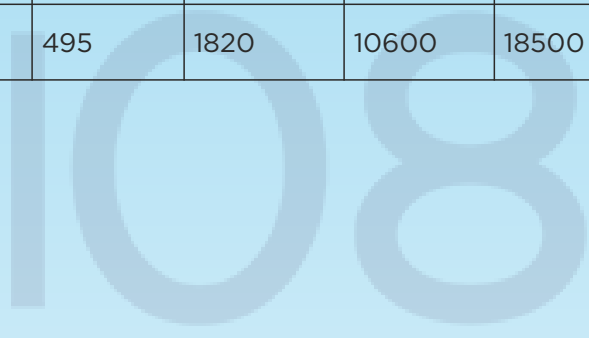



Code : GRP-OTR-Port Use Tire

BIAS OTR TYRE

Size	Pattern	Pattern Depth (mm)	Standard Rim	Inflation Pressure	LOAD CAPACITY									Section Width (mm)	Overall Diameter (mm)	TL/TT
					0km/h	Creep	5km/h	10km/h	15km/h	20km/h	25km/h	30km/h				
					Static	Creep	3mph	5mph	9mph	12mph	15mph	19mph				
18.00-25	40	69	13.00/2.5	1000kPa	kg	30600	27200	24650	22950	22100	21590	21250	21080	526	1673	TL
				145psi	lbs	67470	59980	54350	50610	48730	47610	46860	46480			
16.00-25	36	62	11.25/2.0	1100kPa	kg	24090	21415	19470	18060	17400	16980	16705	16535	432	1548	TL
				160psi	lbs	53105	47205	42915	39810	38360	37440	36840	36470			
16.00-25	32	62	11.25/2.0	1000kPa	kg	22100	19650	17800	16600	16000	15600	15350	15195	432	1548	TL
				145psi	lbs	48730	43320	39240	36595	35280	34430	33880	33540			
16.00-25	28	62	11.25/2.0	900kPa	kg	20700	18400	16675	15525	14950	14605	14375	14260	432	1548	TL
				130psi	lbs	45640	40570	36770	34230	32970	32200	31700	31440			
14.00-25	28	57	10.00/1.5	1000kPa	kg	18000	16000	14500	13500	13000	12700	12500	12400	386	1417	TT
				145psi	lbs	39690	35280	31970	29770	28670	28000	27560	27340			
14.00-24	32	57	10	1100kPa	kg	19605	17430	15845	14700	14160	13820	13600	13460	386	1417	TT
				160psi	lbs	43220	38420	34925	32400	31200	30450	29960	29660			
14.00-24	28	57	10	1000kPa	kg	18000	16000	14500	13500	13000	12700	12500	12400	386	1417	TT/TL
				145psi	lbs	39690	35280	31970	29770	28670	28000	27560	27340			
12.00-24	24	54	8.5	1000kPa	kg	13600	12150	11000	10250	9850	9650	9500	9400	333	1300	TT
				145psi	lbs	29980	26785	24250	22595	21715	21265	20940	20720			
12.00-20	24	45	8.5	1000kPa	kg	14260	12700	11510	9800	9440	9230	8250	8180	340	1173	TT
				145psi	lbs	31430	28000	25370	21600	20800	20340	18180	18030			
10.00-20	18	40	7.5	1000kPa	kg	9630	8560	7780	7255	6990	6830	5520	5480	300	1097	TT
				145psi	lbs	21220	18870	17150	16000	15400	15050	12160	12080			